**Description:**

wall volleyball system with net tensioner, in galvanized steel tubing diam. 70 mm length 1500, the system must be fixed to the wall using dowels specific to the type of wall.

Height adjustment by sliding cursors with winch equipped with belt for net pulling

Components list:

- 2 poles;
- N ° 2 Plates with coupling;
- N ° 2 simple sliding doors;
- N ° 1 sliding with winch;
- N ° 3 Male handwheels M10x20;
- N ° 1 Belt;
- N ° 4 Caps 80x40mm;
- N ° 2 clamp for Ø6mm rope;
- N ° 2 hooks 8x80mm;

Assembly operations

Fix the system with specific plugs for the type of wall, (plugs not included) the mobile part has to be screwed in the upper part with the coupling of the pipe facing downwards.

WARNINGS

Before using the system or starting the assembly, read the instructions carefully and make sure that all the components are present;

This facility is designed exclusively for playing volleyball and not for any other purpose;

Secure the system with dowels specific to the type of wall do not hang on the system (dowels not included);

The manufacturer cannot be considered responsible for any damage caused by improper and unreasonable use;

MAINTENANCE

Check once a year that all fasteners are fully tightened;

Check periodically and in any case once a year the general condition of the structure.

In the event of structural failures or deformations, breakages or anomalies in general, contact the installer or dealer immediately.

Moving part


2500

Fixed part


130

1560



USE OF THE WINCH TENSIONER

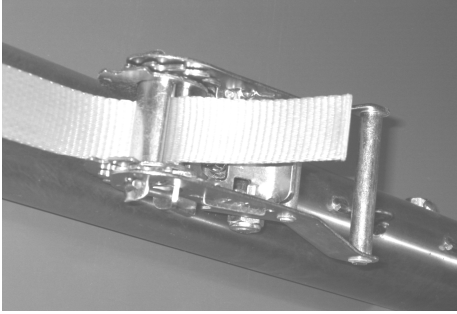

Insert the tape inside the winch.

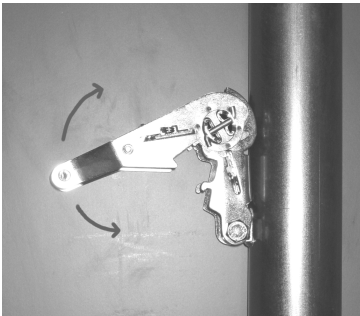

To tension the net, pull the tape with the use of the special winch by moving the knob repeatedly first upwards and then downwards as in the image alongside.

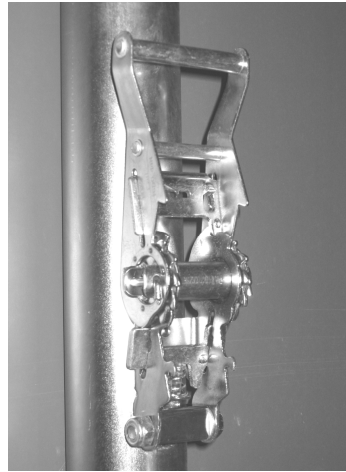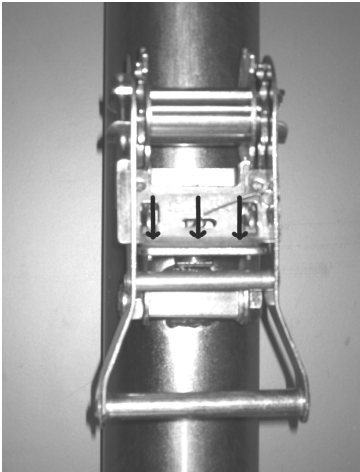

To remove or decrease the tension of the belt, hold down the blade of the winch down and move the lever upwards as in the drawing. Then grab the ribbon and pull to remove it.